

LARDEC WOODSTAIN & PRIMER

**LONGLASTING OIL
BASED WOODSTAIN**


Lardec is a solvent-based, long-chain, alkyd wood stain and primer. It is ideal for use on all joinery components; for example, window frames, doors, garden sheds and garden furniture, poultry houses, etc. Lardec will not peel or flake and can be over-painted. It has excellent penetration and 'run off' properties and won't obscure the grain. Lardec is also available in a higher resin-solids version (Lardec 24) for improved performance.

OIL BASED STAIN

READY TO USE

EASY TO APPLY

RANGE OF STANDARD COLOURS

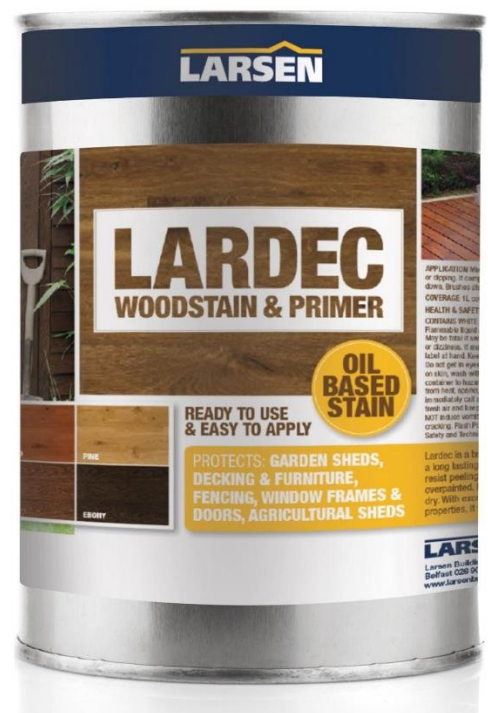

TECHNICAL INFORMATION**PRODUCT INFORMATION**

FORM:	Solvent based minimal build wood stain
COLOURS:	Redwood, Pine, Teak, Ebony
SPECIFIC GRAVITY:	0.85 g/ml
VOC:	less than 700g/L
FLASH POINT:	36°C
DRYING TIME @ 20°C:	<u>Touch Dry:</u> 2 hrs <u>Hard Dry:</u> 8 hrs
MIN. APPLICATION TEMP.:	5°C (for 36 hrs)
COVERAGE:	1L will cover 5-10 m ² (depending on timber)

DIRECTIONS FOR USE

PREPARATION

Sand surface lightly. Surfaces must be clean, dry, and free from dust and grease.

APPLICATION

Ready to use - do not dilute. Mix well before use. Always check colour before use. Brush or spray apply. Alternatively, a dip tank system may be used.

CAUTION

Ensure adequate ventilation during application and curing. Avoid naked flames - flammable. Do not apply to wet surfaces, in conditions of high humidity or when rain is forecast. Protect from rain until dry. No smoking during application. If in doubt, contact our Technical Department.

CLEANING

Clean tools, equipment, etc. using white spirit or proprietary brush cleaner.

STORAGE

Lardec should be stored in closed containers protected from extremes of temperature. Partially used packs may develop a skin on storage.