



LARSEN



FLOORING

TECHNICAL DATA SHEET

QUICKSET


20+ N/mm² IN 2 HOURS

UP TO 75mm IN SINGLE LAYER

WEARING FINISH

TRAFFIC IN 2-4 HOURS

Quickset is a blend of specially selected aggregates, cements and additives to give a very fast setting cementitious patching screed mortar with high early strength. Rapid repairs can be carried out on screeds, pavements and factory floors with minimal obstruction and downtime. Quickset can be used for other rapid setting applications, such as the bedding of manhole covers, etc. Quickset is chloride-free, sulphate resistant and non-corrosive to reinforcing steel, and generally does not require a bonding agent.

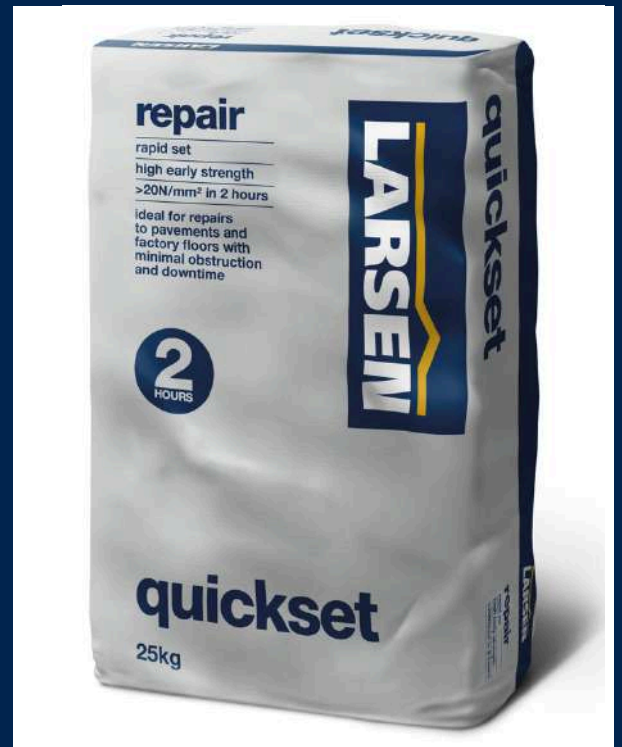

NBS Source
PARTNER

For further information, consult our Technical Department.

Belfast 028 9077 4000 Birmingham 028 9053 5409 Dublin 01 8348255

LarsenBuildingProducts.com



TECHNICAL DATA SHEET

PRODUCT INFORMATION

FORM:	Free-flowing powder
COLOUR:	Dark Grey
MAXIMUM AGGREGATE SIZE:	3.0 mm
HAZARD INFORMATION:	IRRITANT – Contains cement. Consult Safety Datasheet before use
CLEANING:	Clean tools, equipment, etc. using warm water. Mechanical means are necessary when the product has set.
PACKAGING:	25kg multi-wall paper sacks
STORAGE CONDITIONS:	Store in sealed containers in dry conditions, protected from extremes of temperature.
SHELF LIFE:	6 months in unopened manufacturer's packaging.

TECHNICAL INFORMATION

WET DENSITY:	2300 kg/m ³
BED THICKNESS:	5 – 75 mm
WORKING TIME:	5-10 mins @ 20°C
MIX PROPORTIONS:	Up to 3.2L per 25kg
TIME TO TRAFFIC: (depending on site conditions)	Light Foot Traffic: after 2 - 4 hours Full Traffic: after 1 - 2 days Covering: after 1 - 2 days
COMPRESSIVE STRENGTH:	2hr 20MPa 4hr 25MPa 7 day 35MPa 28day 40MPa
COVERAGE:	Dependent on the nature of the surface and usage. Approx. 1 m ² /25 kg @ 10 mm bed

TYPICAL PERFORMANCE INFORMATION

DENSITY:	
BRE TEST CATEGORY:	
COMPRESSIVE STRENGTH:	
CLASSIFICATION:	

DIRECTIONS FOR USE

PREPARATION

APPLICATION