

# LARSEN BUILDERS MERCHANTS

## TECHNICAL DATA SHEET

# **Protim WB 7 Wood Preservative**

WATER BASED

TRIPLE ACTION


**DEEP PENETRATING** 

**PREVENTS DRY & WET ROT** 

**KILLS WOODWORM** 

## **STOPS REINFESTATION**

PROTIM WB 7 is a water based ready to use wood preservative for the treatment of new and existing timber. It contains active ingredients effective for preventing and eradicating wood destroying fungi (including dry rot) and wood boring insects. For application on all exterior timber, which is not in direct contact with the ground or surface water, e.g.: joists, end grains, fences, sheds etc. The product is tinted for ease of identification of treated areas. For use by non professionals.

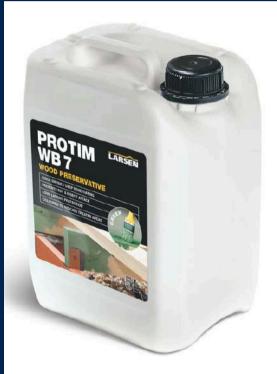



For further information, consult our Technical Department. Belfast 028 9077 4000 Birmingham 028 9053 5409 Dublin 01 8348255 LarsenBuildingProducts.com



# TECHNICAL DATA SHEET

## TECHNICAL DATA SHEET

### **PRODUCT INFORMATION**

FORM	Water based liquid	
COLOUR	Clear, green or brown	
HAZARD INFORMATION	WARNING. May cause an allergic skin reaction. Very toxic to aquatic life with long lasting effects.	
CLEANING	Wash equipment with water	
PACKAGING	5L, 25L	
STORAGE CONDITIONS	Protect from frost and below 30°C. Store in a safe place away from food or feed stuffs.	
SHELF LIFE	Minimum 24 months in unopened manufacturer's packaging	

### **APPLICATION INFORMATION**

ACTIVE	CONTAINS Propiconazole <1%, Permethrin <1%
APPLICATION RATE	25-75ml/m2 initial coat 150ml/m2 subusequent coats
APPLICATION METHOD:	Low pressure spray, brush or roller.
APPLICATION TEMPERATURE:	+5°C to +30°C
DRYING TIME	24-48 HOURS

OVERCOAT

After at least 24-48 hours

#### **UK AUTHORISATION**

Protim WB Clear	GB-2020-1259-3-0003	Protim WB Clear	IE/BPA 70813-03
Protim WB Green	GB-2020-1259-3-0011	Protim WB Green	IE/BPA 70813-03
Protim WB Brown	GB-2020-1259-3-0015	Protim WB Brown	IE/BPA 70813-03

The information and recommendations above are given in good faith based on our current knowledge and experience of the products when properly stored, handled, and applied in accordance with current best practice, national standards, and our recommendations. As we have no control over site conditions or methods of application, no liability can be derived from the contents of this information sheet, or from any written recommendations, or from any other advice offered. The user of the product is solely responsible for the product's suitability for the intended application and is recommended to test the suitability prior to use. We reserve the right to change the properties of our products without notice. All orders are sold subject to our current terms of sale and delivery. With the publication of this Technical Information Sheet all previous editions are no longer valid.

## DIRECTIONS FOR USE

#### PREPARATION

Shake before use. Wood should be clean, dry and free from wood dust, paint, varnish and other contaminants which may prevent penetration. If necessary, all deteriorated wood should be removed and surface sanded down to a clean. sound surface.

#### **APPLICATION**

Supplied ready for use, do not dilute. Apply by suitable spray, roller or brush at a rate of 25-75ml/m2 Subsequent coats should be applied at a rate of 150ml/m2

#### DRYING

Product is touch dry in 24-48 hours depending on wood and ambient conditions. Allow at least 24-48 hours before overcoating or application of subsequent top coats.

#### RESTRICTIONS

Product colour is for identification only and is not designed as a lasting decorative wood stain. If used internally, consideration should be given to ensure sufficient ventilation exists and that habitable areas can remain vacated until odour has dissipated. Alternatively, use Larsen Low Odour Universal Wood Preservative on internal timber.

STATUTORY CONDITIONS OF APPROVAL RELATING TO USE : FOR USE ONLY AS A WOOD PRESERVATIVE. Apply by brush or roller at a rate of 25-75ml/m2 then 150ml/m2 Users must comply in full with all their legal responsibilities under The Control of Pesticide Regulations 1986 (as amended), including complying with all conditions of approval. This product is approved under The Control of Pesticides Regulations 1986 (as amended) for use as directed.

#### **READ ALL PRECAUTIONS BEFORE USE - SEE NEXT PAGE**

#### **IRELAND AUTHORISATION**

Protim WB Clear	IE/BPA 70813-03-003
Protim WB Green	IE/BPA 70813-03-011
Protim WB Brown	IE/BPA 70813-03-015



## TECHNICAL DATA SHEET

## **DIRECTIONS FOR USE continued**

#### PRECAUTIONS

This material and its container must be disposed of in a safe way. Do not contaminate foodstuffs, eating utensils or food contact surfaces. Unprotected persons and animals should be kept away from treated areas for 48 hours or until surfaces are dry. Avoid all contact with plant life. Cover all water storage tanks before application. All bats are protected under the wildlife and countryside act 1981. Before treating any structure used by bats, consult natural England, Scottish natural heritage or the countryside council for Wales. Hazardous to bees. Do not use on beehives or beekeeping equipment. Wash hands and exposed skin before meals and after use. Keep in a safe place.

#### QUALITY

This product is manufactured in a plant controlled under an integrated management system third party certified to BS EN ISO 9001.

#### Use biocides safely. Always read the label and product information before use.

Marketed by: Protim Solignum Ltd Lingfield Way, Darlington DL1 4QA, United Kingdom

Manufactured under licence and distributed by:

Larsen Building Products Tel: +44 (0)28 90774000 www.larsenbuildingproducts.com

The information and recommendations above are given in good faith based on our current knowledge and experience of the products when properly stored, handled, and applied in accordance with current best practice, national standards, and our recommendations. As we have no control over site conditions or methods of application, no liability can be derived from the contents of this information sheet, or from any written recommendations, or from any other advice offered. The user of the product is solely responsible for the product's suitability for the intended application and is recommended to test the suitability prior to use. We reserve the right to change the properties of our products without notice. All orders are sold subject to our current terms of sale and delivery. With the publication of this Technical Information Sheet all previous editions are no longer valid.